

Download RoamWiFi APP
From APP Store by searching "RoamWiFi"



RoamWiFi


RoamWiFi R9 MANUAL

Official Site: <http://www.roamwifi.hk>
Customer Service: 4006-678-439(Mon-Sun 8:30-22:00 GMT+8)
Email: service@roamwifi.com

Tianjin RoamWiFi Technology Co.,Ltd

R9 4G

ROAMWIFI R9 APPEARANCE

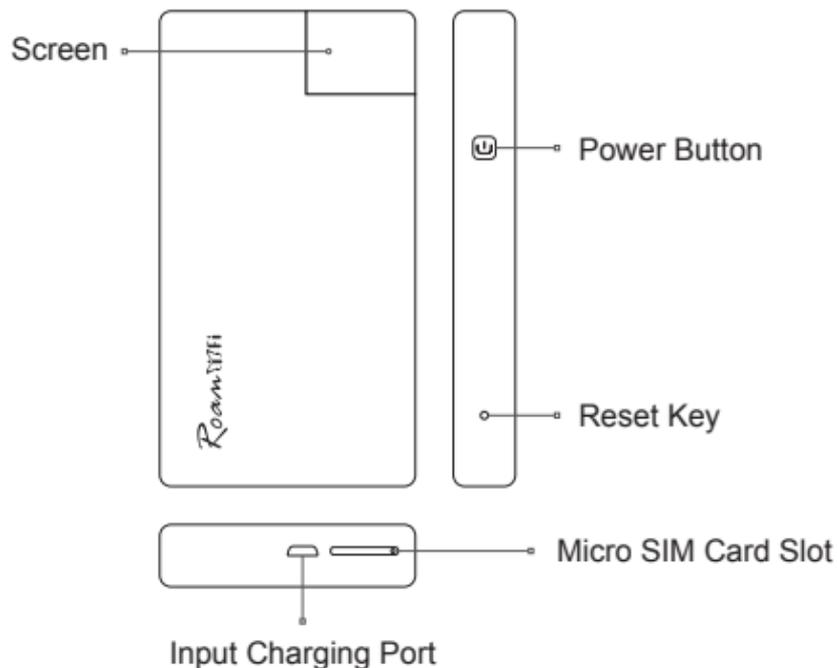

FUNCTION DESCRIPTION



Power Button

Long press the power button for 3 seconds to power on/off, short press to wake up device or switch screen.

Reset Key

With RoamWiFi R9 device power on, tap the key for 3 seconds, device will be reset.



Micro SIM Card Slot

Insert SIM / USIM card here.



Input Charging Port

Charge device through data cable.



Screen

Display of RoamWiFi R9 device information, network connection status, etc.

NETWORK STANDARDS

Support multi-bands of LTE FDD, bands of 1,2,3,4,5,7,8,17,19,20



Support HSPA + /UMTS (2100MHz / 1900MHz / 1700MHz(AWS) / 900MHz / 850MHz)

Maximum downstream rate 150Mbps

Maximum upstream rate 50Mbps

Maximum rate 150Mbps



Support 802.11 b/g/n

Support band 2.4G

Support simultaneous connections for 5 devices

BATTERY

Battery Capacity: High-capacity battery of 5000mAh

Charging Voltage: DC 5V 1A

Full Charging: 6 hours required

Battery Life: Standby for 24 hours. In using for 12 hours. Please charge first if not prolonged used.

Note-1: The ambient temperature should be 0 ℃ - 45 ℃ ; 20% battery capacity would be lost after normal using for one year.

Note-2: Do not over charge or discharge, users are highly recommended to: recharge every 2 months if not in used.

INSTRUCTIONS

How to Connect to RoamWiFi:

1 Reserve Internet Service

To ensure internet access, please reserve internet service on RoamWiFi APP(download from APP store by searching "RoamWiFi") of Destination Countries before departure.

2 Connect Network

After power on, RoamWiFi takes 2-3 minutes to connect and access to the preferred local network. Connecting details will be displayed in the screen.


3 Surf Internet

With RoamWiFi R9 device on, short press the power button, WiFi hotspot name(SSID) and password(PWD) will be displayed in the screen, connect your smart phone or pad to RoamWiFi network by input password to start surfing internet.

SIM CARD SETTING


RoamWiFi R9 provides a second using mode by enabling SIM Card, setting as follows:

As shown in the figure below, insert SIM Card under the power off status of RoamWiFi R9 device.

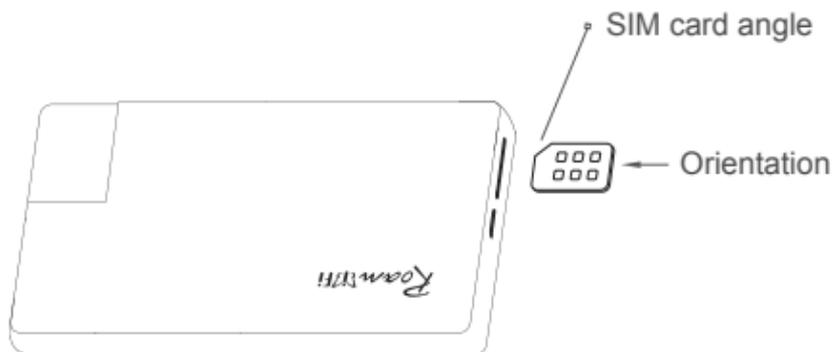

SCREEN

Interactive screen will be displayed after network successfully connected:

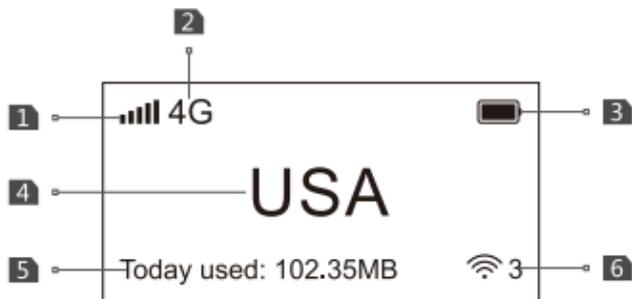

- 1 Signal strength
- 2 Network type (3G / 4G)
- 3 Battery icon(→ means it is in charging)
- 4 Country in using
- 5 Traffic used today
- 6 Number of connections

SCREEN

Short press the power button to switch to the second screen:



- 1 RoamWiFi R9 hotspot name(SSID) and password(PWD)
- 2 RoamWiFi R9 version, if SIM Card inserted, the screen will display "SIM in using"

PRECAUTIONS

Please read the following precautions before using:

- Handle with care, device should be kept cleanly.
- Do not put in place with wet, water or other liquids.
- Do not put in place of extremely high or low temperatures.
- Do not put near flame or lit tobacco.
- Do not drop, throw, bend or demolish.
- Do not put or install on top of car airbags.
- Altitude: ≤ 2000 meters, the power adapter determines the applicable altitudes for using.
- Ambient Temperature: device can be normally used at the temperature of $-10\text{ }^{\circ}\text{C} \sim 60\text{ }^{\circ}\text{C}$.

ENVIRONMENTAL DECLARATION

The following statements are in line with relevant provisions of the "Electronic Information Products Pollution Control Management Measures" of the People's Republic of China. Listed declaration applies to RoamWiFi R9:

Toxic and Hazardous Substances or Elements				
Name	Lead Pb	Mercury Hg	Cadmium Cd	Hexavalent Chromium Cr6+
RoamWiFi Device	O	O	O	O
Accessories	O	O	O	O
Name	Polybrominated Biphenyls PBB		Polybrominated Diphenyl Ethers PBDE	
RoamWiFi R9	O		O	
Accessories	O		O	

O: Indicates that this toxic or hazardous substance in all homogeneous materials are within the limit requirements in SJ / T 11363-2006 standard.
X: Indicates that this toxic or hazardous substance contained in at least one of the homogeneous materials is in excess of requirements in SJ / T 11363-2006 standard.